



Floating Lane Roller



STAINLESS STEEL
AISI-304L

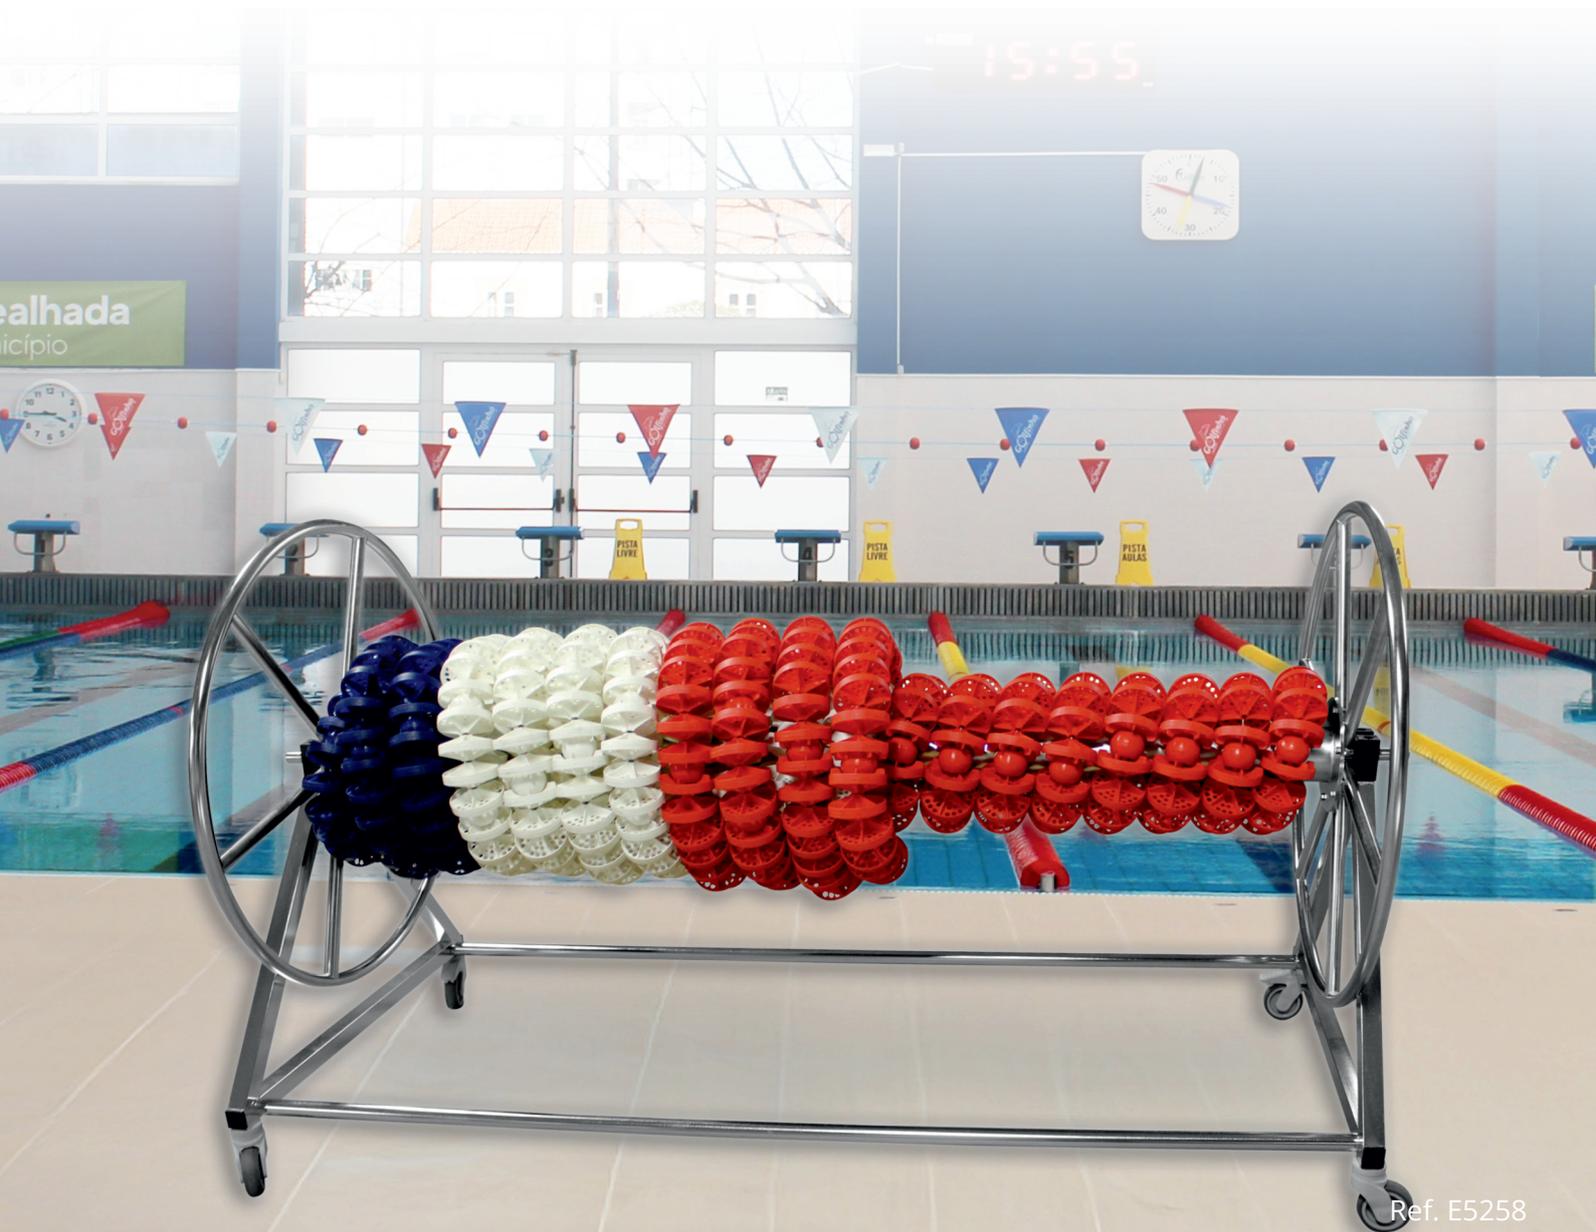

Ref. E5258



The Golfinho Sports Floating Lane Roller provides easy and organised storage and transport of floating lanes.

Made of electropolished AISI-304L stainless steel, it guarantees corrosion resistance in environments with constant exposure to moisture.

This equipment is supplied unassembled, but is quick and easy to assemble.



Advantages

High durability

Professional finish

Fast winding

Easy to transport

Adaptable to any pool



Available References

E5258.150 Length: 150cm



E5258.200 Length: 200cm

Storage Capacity

	Competition Elite	Competition	Training
E5258.150	50mts	100mts	200mts
E5258.200	75mts	150mts	300mts



Dimensions

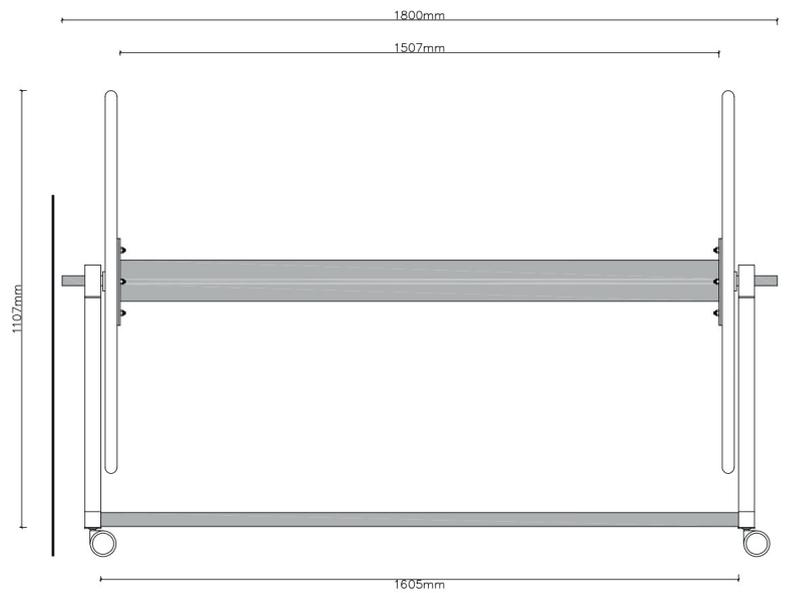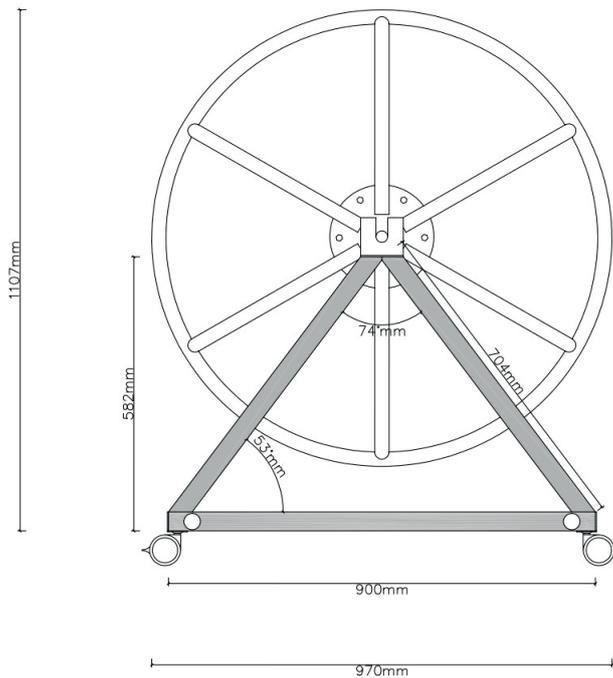

Related Products




E5259.150 150cm

E5259.200 200cm

Floating Lane Roller Base

Manufactured in stainless steel AISI-304L. With 4 spinning wheels, 2 with break. One base can be used with various rollers. Delivered unassembled.

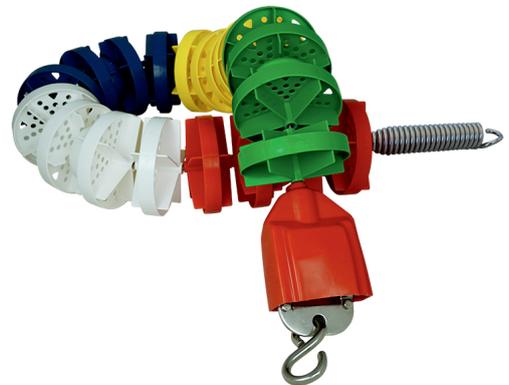

E5239.MTSS Meter*

E5239.25SS 25m** According to the WORLD AQUATICS standards

E5239.50SS 50m** According to the WORLD AQUATICS standards

Competition Floating Lane Stainless Steel

Formed by 100mm disks (E5238), exclusive Golfinho Sports design, and by microdonut floaters (E5295).

*Special tensor and tension spring not included

**Special tensor and tension spring included





E5304.MTSS Meter*

E5304.25SS 25m** According to the WORLD AQUATICS standards

E5304.50SS 50m** According to the WORLD AQUATICS standards

Competition Elite Floating Lane Stainless Steel

Formed by 150mm disks (E5303), exclusive Golfinho Sports design, and by microdonut floaters (E5295).

*Special tensor and tension spring not included

**Special tensor and tension spring included



E5296.MTSS Meter*

E5296.25SS 25m** According to the WORLD AQUATICS standards

E5296.50SS 50m*** Cumprindo as normas WORD AQUATICS

Training Dividing Line Stainless Steel Cable

With Training donut floaters (E5294).

*Fixing accessories not included

**Includes an AISI-316L stainless steel hook

***Includes an AISI-316L stainless steel stabilizer spring

